



Standard grade for cash register- and ATM receipt use. Good print definition. BPA containing.

**PAPER PROPERTIES**

ITEM	UNIT (SI)	VALUE (SI)	UNIT (US)	VALUE (US)	TEST METHOD
Grammage	g/m <sup>2</sup>	48 ± 4	17x22 - 500 lbs	12.8 ± 1.1	ISO 536
Thickness	µm	55 ± 4	mils	2.2 ± 0.2	ISO 534
Moisture	%	6.0 ± 1.0			ISO 287
Tensile strength (MD)	kN/m	min. 2.1	lbf/in	min. 12.0	ISO 1924-3
Tensile strength (CD)	kN/m	min. 1.1	lbf/in	min. 6.3	ISO 1924-3
Tear strength (MD)	mN	min. 200	gf	min. 20.4	ISO 1974
Tear strength (CD)	mN	min. 220	gf	min. 22.4	ISO 1974
Brightness	%	min. 80			ISO 2470
Smoothness BEKK	s	min. 350			ISO 5627

**IMAGE PROPERTIES**


ITEM	UNIT	VALUE	TEST METHOD
Image color		black	
Dynamic sensitivity	• - •••	•••	•••• = highest sensitivity
Maximum density	• - •••	•	

**STABILITY PROPERTIES**

ITEM	UNIT	VALUE	CIRCUMSTANCES
Heat resistance background	OD	max. 0.20	60 °C, 24 h
Heat resistance image loss	OD%	max. 20	
Humidity resistance background	OD	max. 0.20	40 °C, 90% rh, 24 h
Humidity resistance image loss	OD%	max. 20	
Light resistance background	OD	max. 0.20	5000 lux, 100 h
Light resistance image loss	OD%	max. 10	
Image stability	years	min. 7	Correct storage for thermal papers

**EXAMPLES OF COLOR DEVELOPMENT GRAPHS**

DYNAMIC SENSITIVITY

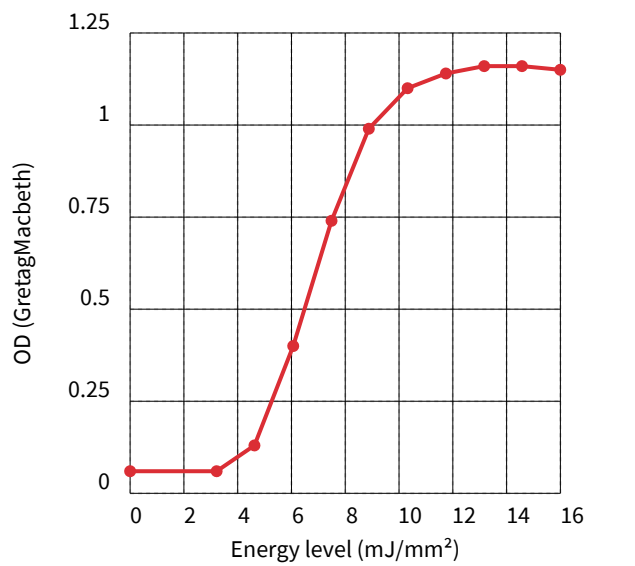

STATIC SENSITIVITY

